


Multi-Purpose PE Tape

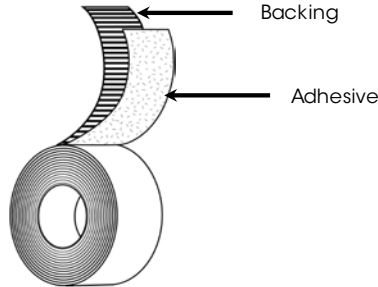

Backing:	Polyethylene Film
Adhesive:	Synthetic Rubber
Liner:	N/A
Colors:	Red, White, Black, Silver, Teal, Blue, Orange, Clear, Pink*, Green*
Specifications:	N/A
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Abatement industry: hang and patch PE sheeting, seal waste disposal bags, etc.
- Labeling and color coding
- Short-term masking for stucco and plaster
- Bundling, wrapping, and repairs
- Wire hold down (AV Cord Tape)
- Convention industry - bundling carpet, securing PE carpet protection, color coding, etc.
- Polyethylene splicing
- Surface protection
- Dissimilar metal tape

Features

Benefits

- | | |
|--|--|
| <ul style="list-style-type: none"> • Polyethylene Film Backing • Synthetic Rubber Adhesive • Low VOC, <u>Contains no heavy metals</u> (such as lead and chromium) | <ul style="list-style-type: none"> • Conformable and flexible • Excellent durability and solvent resistance • Low elongation for consistent surface bond • Pinked/Serrated Edge available for hand tearability • High tack for good quick stick • Excellent shear strength • Repositionable and clean removal from many surfaces • Environmentally friendly & safe to use. |
|--|--|

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness (Colors)	7.0	mils	0.18	mm	ASTM D-1000
Adhesion to Steel	75	oz/in	8.21	N/cm	PSTC-101
Adhesion to Backing	35	oz/in	3.8	N/cm	PSTC-101
Tensile Strength	25	lb/in	43.78	N/cm	ASTM D-1000
Application Temperature	30 to 160 °F		-1 to 71 °C		
Operating Temperature	20 to 200 °F		-7 to 93 °C		
Elongation	85%				

Recommended Storage Conditions: 32-90 °F at 50% RH ± 2%

* Subject to availability and minimum order

Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.