




Professional Products
Professional Results



CONCENTRATED FORMULA

LEAD SAFE

MAKES 20 Gallons

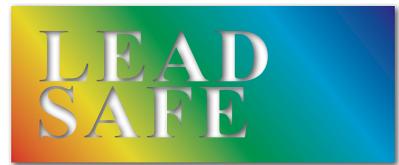

LEAD DUST CLEANER



LEAD DUST CLEANER

Formulated To Control and Remove Lead Dust

- More effective than traditional cleaning products
- Faster cleanup and compliance
- Contains active chelating agents

Lead Abatement Products

LeadSafe Lead Dust Cleaner is a concentrated product designed specifically to assist in the cleanup of lead dust after lead abatement projects, construction, renovation or any other activity which disturbs lead and creates dust. This product has been formulated to remove more lead dust than ordinary cleaning products. LeadSafe Cleaner utilizes chelating agents similar to those given to individuals with lead poisoning. These chelating agents bind to the lead dust and help hold it in suspension so that it can be easily rinsed away.

Dilution Dilute 6-7 oz. per gallon of water. One gallon will make 20 gallons. One gallon of diluted product will clean approximately 500 square feet of hard, non-porous surfaces.

Directions Clean and remove all belongings from the area to be cleaned. Prior to application use a HEPA filtered vacuum on all surfaces. Starting at the end farthest from the exit, vacuum the room towards the exit beginning at the top of each room and working down.

When applying the cleaning solution start in a far corner working towards the exit of the room to avoid re-contamination of the cleaned areas. Always wear appropriate personal protective equipment (PPE) including gloves and eye protection during any lead abatement or cleanup activity. See warnings below for additional precautions. Store in a closed container.

Dispose of contents/container in accordance with all local, state, and federal regulations.

Three Bucket Cleaning System By following this system you will minimize the risks of reintroducing lead back into the cleaned environment.

Bucket 1 – Contains uncontaminated LeadSafe cleaner solution.

Bucket 2 – This bucket is empty and will be used to hold all dirty water.

Bucket 3 – Contains clean water for rinsing.

1. Using a mop, rag or sponge dip into bucket #1 and begin cleaning surfaces until clean.
2. Ring out mop, rag or sponge into bucket #2 and return to bucket #1 for more cleaning solution.
3. Use clean water from bucket #3 to rinse surfaces.
4. Replace cleaning solution and rinse water when dirty.

For tough to clean surfaces including porous surfaces use warm water when mixing the solution and allow the product to sit for 10 minutes prior to cleaning.

Warning: Children and pregnant women should never participate in any activity which could result in them contacting or ingesting lead, lead-based paint or lead dust. All individuals should wear rubber gloves during lead abatement or clean up. If ingested, lead dust can result in lead poisoning. Wash hands, face and any exposed skin before starting any other activity including eating or drinking.

Permanent Lead Abatement Paint

LBC & ChildGuard - Permanent lead abatement coatings which offer unparalleled coverage, economics and paint-like aesthetics while preserving historic and architectural detail.

Both LBC & ChildGuard contain Bitrex®, a bitter-tasting, non-toxic anti-ingestant to discourage oral contact with the coating.

Lead Dust Cleaning Wipes

Lead Safe Wipes - Meet specific requirements in the RRP Rule by satisfying the work practice standards. LeadSafe wipes are designed specifically to efficiently remove harmful lead dust during and after renovations, repairs, painting or abatement. These convenient, easy-to-use heavy-duty, pre-soaked towels meet all federal, state, HUD, and EPA guidelines for cleaning and removing lead dust.

For Technical Information call 800.342.3755

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use of this product are beyond our control. Neither ICP Construction, Inc., nor its agents shall be responsible for the use of this product or any procedures or apparatus mentioned. We recommend that the prospective user determine the suitability of this product, for each specific project and for the health and safety of personnel working in the area.

For additional information check Safety Data Sheet (SDS) or Product Data Sheet (PDS) available online at www.fiberlock.com.

LEAD SAFE, the LEAD SAFE Logo and other marks in this literature are trademarks of ICP Construction, Inc.

Contact federal, state and local environmental agency to determine the appropriate method to dispose of all contaminated materials including mops, rags, sponges, buckets, clothing, rinse water, cleaning solution and clothing. Store in a dry place at temperatures between 40°F (4.5°C) and 90°F (32°C).

CONTAINS: Water (7732-18-5), Alkyl Polyglucoside (68515-73-1), Sodium Octane Sulfonate (5324-84-5), Citric Acid (77-92-9), Water conditioner (N/A)

FIBERLOCK LEADS SAFE CLEANER 5496

WARNING | ATTENTION

H320 - Causes eye irritation.

H320 - Provoque une irritation des yeux

Wash all exposed external body areas thoroughly after handling.; See SDS for full list of P phrases

Se laver toutes les zones du corps exposées externes soigneusement après manipulation. | Voir SDS pour la liste complète des phrases P

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.; If eye irritation persists: Get medical advice/attention.; See SDS for full list of P phrases

EN CAS DE CONTACT AVEC LES YEUX: rincer avec précaution à l'eau pendant plusieurs minutes. Enlever les lentilles de contact si la victime en porte et si elles peuvent être facilement enlevées. Continuer à rincer. | Si l'irritation oculaire persiste: consulter un médecin. | Voir SDS pour la liste complète des phrases P

Canadian Contact Info:
4050-B Sladeview Crescent Suite 200
Mississauga, ON L5L 5Y5 Canada

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

5496-1



6 11131 95481 2



150 Dascomb Rd.
Andover, MA 01810
(800) 342-3755
www.fiberlock.com

Rev. 10.16.18